SK2010-086	1	D

REVISIONS			
REV	DESCRIPTION	DATE	BY
A	ADDED ADDITIONAL PLAN SECTION VIEW	31 MAR 11	R.F.T.
B	ADDED ADDITIONAL CLEAR WIDTH DIMENSION	09 DEC 11	R.F.T.
C	UPDATED HINGES	17 AUG 12	R.F.T.
D	ADDED CONSTRUCTION DETAILS	25 OCT 12	R.F.T.

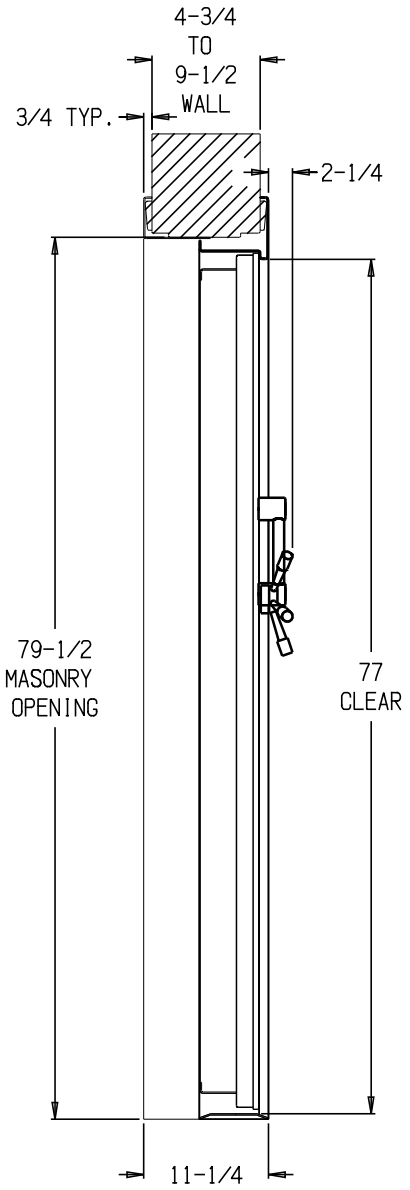

SECTION VIEW

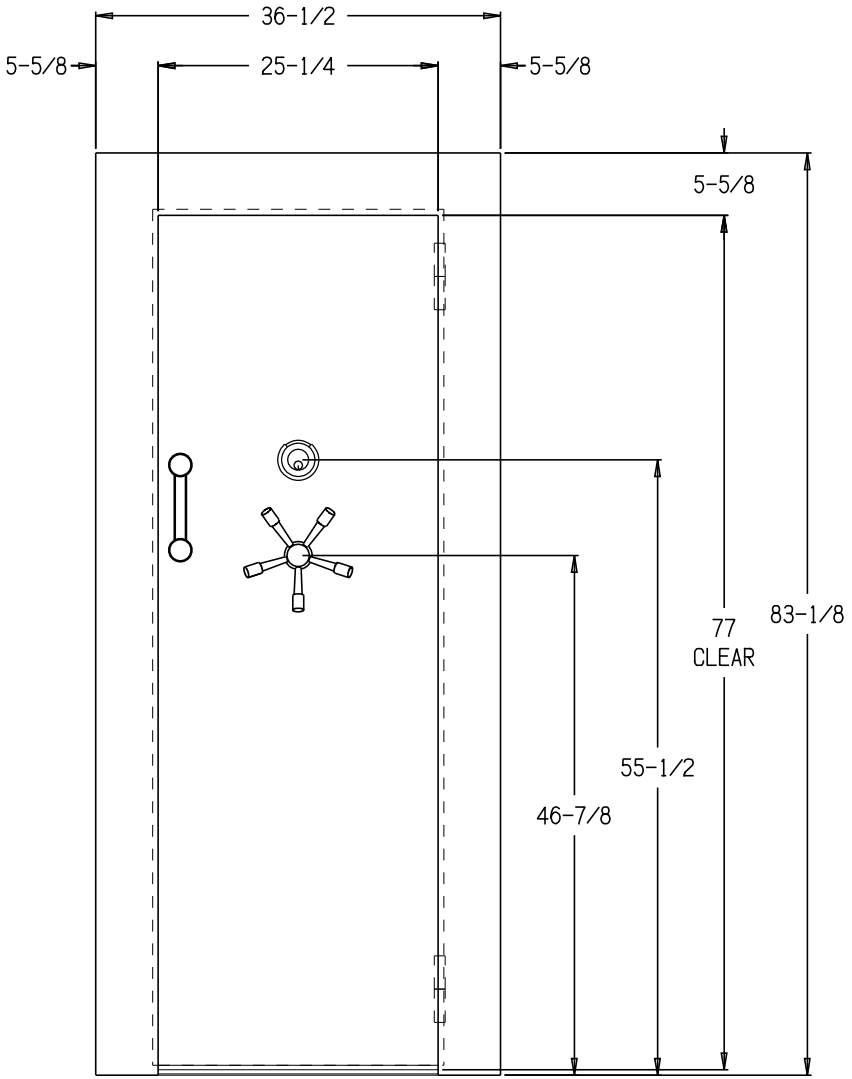

FRONT VIEW

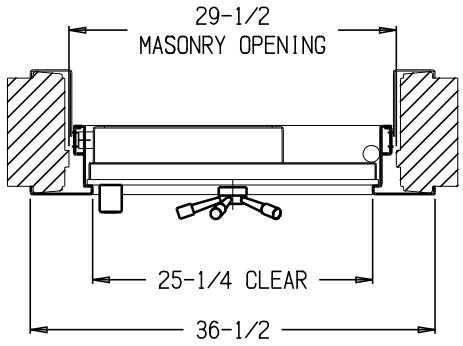

PLAN VIEW SECTION
DOOR CLOSED

MADE IN USA

PROPRIETARY INFORMATION
UNAUTHORIZED RELEASE WITHOUT
EXPRESS WRITTEN PERMISSION OF
AMERICAN SECURITY PRODUCTS CO
EXPRESSLY PROHIBITED

CUSTOMER SIGNATURE	
CUSTOMER NAME	
DATE	
COMPANY NAME	

AMSEC
AMERICAN SECURITY

VD8030BFIS Vault Door

ML #		B	Q #	SK2010-086	D
DRAWN R. Tucker	08 FEB 10	SCALE 1/12	DO NOT SCALE DWG	SHEET 1 OF 3	

SK2010-086	2	D

REVISIONS			
REV	DESCRIPTION	DATE	BY
A	ADDED ADDITIONAL PLAN SECTION VIEW	31 MAR 11	R.F.T.
B	ADDED ADDITIONAL CLEAR WIDTH DIMENSION	09 DEC 11	R.F.T.
C	UPDATED HINGES	17 AUG 12	R.F.T.
D	ADDED CONSTRUCTION DETAILS	25 DCT 12	R.F.T.

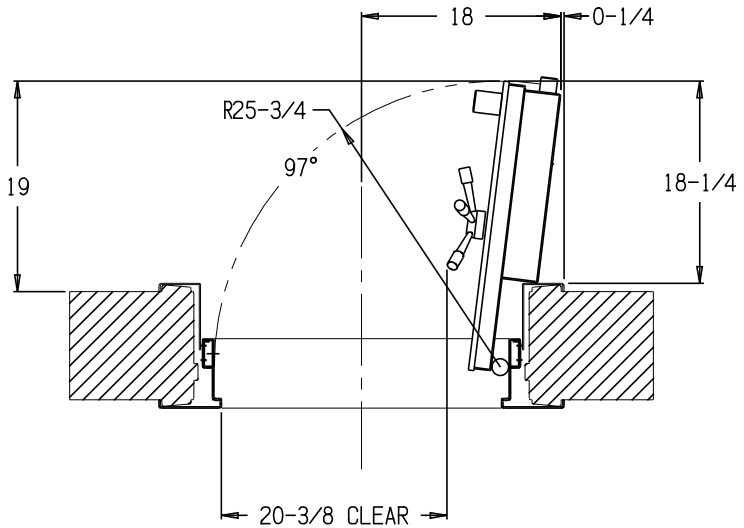

PLAN VIEW SECTION
97° DOOR

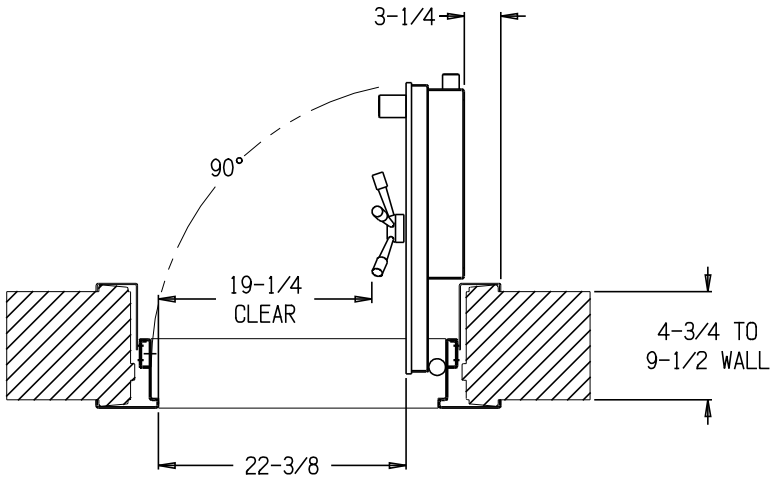

PLAN VIEW SECTION
90° DOOR

MADE IN USA

PROPRIETARY INFORMATION
UNAUTHORIZED RELEASE WITHOUT
EXPRESS WRITTEN PERMISSION OF
AMERICAN SECURITY PRODUCTS CO
EXPRESSLY PROHIBITED

CUSTOMER SIGNATURE	
CUSTOMER NAME	
DATE	
COMPANY NAME	

AMSEC AMERICAN SECURITY

VD8030BFIS Vault Door

ML #		B	Q #	SK2010-086		D
DRAWN R. Tucker	08 FEB 10	SCALE 1/12	DO NOT SCALE DWG	SHEET 2 OF 3		

REVISIONS			
REV	DESCRIPTION	DATE	BY
A	ADDED ADDITIONAL PLAN SECTION VIEW	31 MAR 11	R.F.T.
B	ADDED ADDITIONAL CLEAR WIDTH DIMENSION	09 DEC 11	R.F.T.
C	UPDATED HINGES	17 AUG 12	R.F.T.
D	ADDED CONSTRUCTION DETAILS	25 OCT 12	R.F.T.

SPECIFICATIONS

1. Door, Clear Opening: 77 H x 22-3/8 W at 90°
   Door Swing (19-1/4 W at Handle). 2" Thick Door
   Constructed with a 1/2" Thick Steel Outer Plate,
   and a Steel Inner Plate Filled with Fire Insulating
   Material. Equipped with a UL Listed Three-Wheel
   Key-Change Combination Lock with Spy-Proof
   Key-Locking Dial, Pull Handle, 5-Spoke Handle,
   Relocking Devices, an Inside Release Mechanism
   and Five (5) 1-1/2" Dia. Chrome-Plated Locking Bolts.
   Lock Protected by a Drill-Resistant Hardplate.

2. Wall Opening: 79-1/2 H x 29-1/2 W.

3. Wall Thickness Variation: 4-3/4 to 9-1/2.

4. Approx Weights: Door: 499 lbs.
   Frame, Main: 106 lbs.
   Frame, Rear: 67 lbs. Total Weight: 672

MADE IN USA

PROPRIETARY INFORMATION
UNAUTHORIZED RELEASE WITHOUT
EXPRESS WRITTEN PERMISSION OF
AMERICAN SECURITY PRODUCTS CO
EXPRESSLY PROHIBITED

CUSTOMER SIGNATURE	
CUSTOMER NAME	
DATE	
COMPANY NAME	

AMSEC AMERICAN SECURITY

VD8030BFIS Vault Door

ML #		B	Q #	SK2010-086		D
DRAWN R. Tucker	08 FEB 10	SCALE 1/12	DO NOT SCALE DWG	SHEET 3 OF 3		